


Tarzan Pro Max

N-Type

S9-120GAHT 615~635W

Bifacial Dual Glass

Mono Module

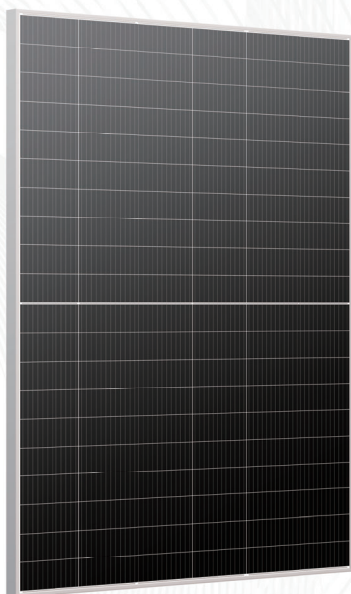

635W

Maximum Power Output

22.44%

Maximum Module Efficiency

0~+5W

Power Output Tolerance

IEC61215, IEC61730
 ISO9001:2015: Quality Management System
 ISO14001:2015: Environment Management System
 ISO45001:2018: Occupational health and safety management systems



10%-30% Additional Power Generation

- 30 years lifespan brings 10-30% additional power generation comparing with conventional P-type module



No B-O LID

- Excellent anti-LeTID & anti-PID performance. Low power degradation, high energy yield.



Excellent Temperature Coefficient

- Excellent temperature coefficient (Pmax): -0.26%/°C, ensures higher generation in extreme temperature areas



Outstanding Low Light Performance

- Higher power output even under low-light environments like on cloudy or foggy days.



Up To 85% Bifaciality


- Higher power output and lower BOS cost.



Enhanced Mechanical Load

- Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal)

Linear Performance Warranty

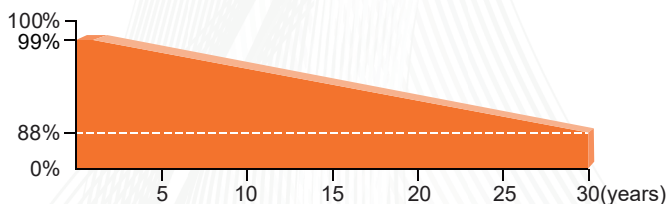

15 Years Product Warranty on Materials and Workmanship

30 Years Linear Performance Warranty

0.375% Subsequent Annual Degradation

Tarzan Pro Max

RS615~635S9-120GAHT

Electrical Properties(STC*)

Power Output(Wp)	615	620	625	630	635
Max Power Tolerance(W)	0-5	0-5	0-5	0-5	0-5
Module Efficiency(%)	21.73	21.91	22.08	22.26	22.44
Voltage Mpp-Vmpp(V)	37.89	38.06	38.23	38.39	38.55
Current Mpp-Impp(A)	16.23	16.29	16.35	16.41	16.47
Voltage Open Circuit-Voc(V)	44.60	44.76	44.92	45.08	45.23
Short Circuit Current-Isc(A)	17.11	17.17	17.23	17.29	17.35

*STC: Irradiance 1000W/m², Cell Temperature 25°C, AM 1.5

Electrical Properties(NOCT*)

Power Output(Wp)	513	518	523	528	533
Voltage Mpp-Vmpp(V)	36.85	37.05	37.25	37.45	37.64
Current Mpp-Impp(A)	13.92	13.98	14.04	14.10	14.16
Voltage Open Circuit-Voc(V)	43.35	43.51	43.67	43.83	43.99
Short Circuit Current-Isc(A)	14.79	14.85	14.91	14.97	15.03

*NOCT: Irradiance 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s


With Different Power Generation Gain (regarding 625W as an example)

Power Gain (%)	Power Output (Wp)	Voltage Mpp-Vmpp (V)	Current Mpp-Impp (A)	Voltage Open Circuit-Voc (V)	Short Circuit Current-Isc (A)
10	688	38.23	17.98	44.92	18.95
15	719	38.23	18.80	44.92	19.81
20	750	38.23	19.62	44.92	20.68
25	781	38.23	20.44	44.92	21.54
30	813	38.23	21.25	44.92	22.40




Packaging Configuration

Packing Type	40'HQ
Piece/Pallet	31
Piece/Container	558

Engineering Drawing (mm)

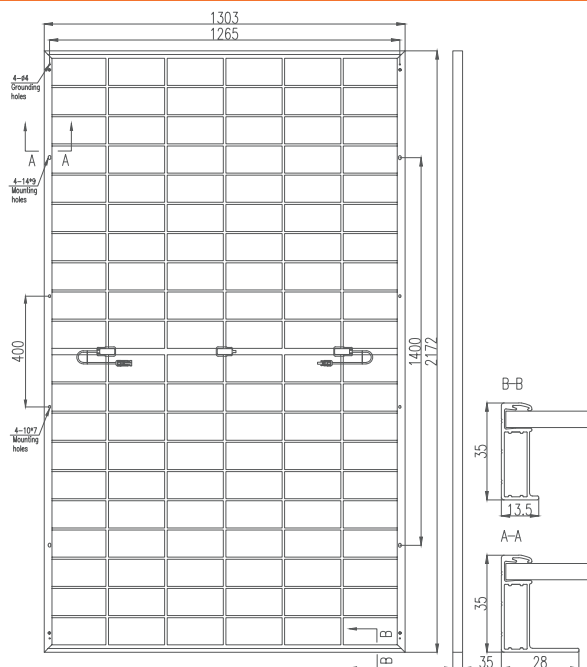

Characteristic Curves(625W)

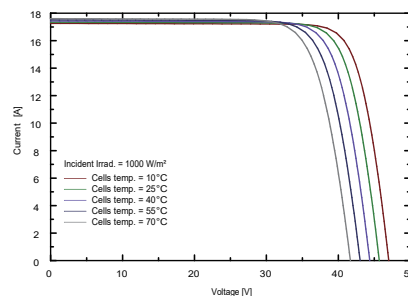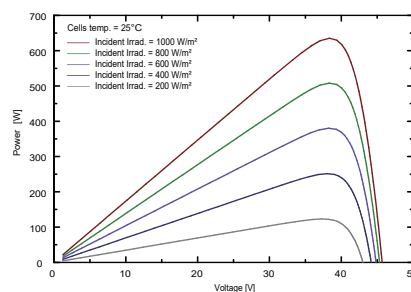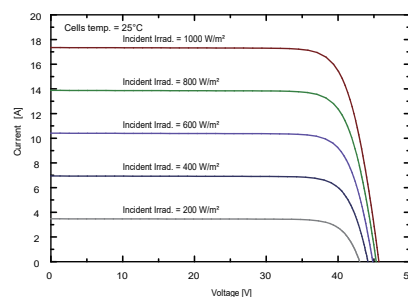

Mechanical Properties

Cell Size	HJT Mono 210mm*105mm
Number of Cells	120 [2 x (11 x 6)]
Module Dimension	2384*1303*35mm
Weight	35kg
Front Glass	2.0mm, Anti-Reflection Coating
Rear Glass	2.0mm, Heat Strengthened Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP68 (3 diodes)
Cable Length	TUV 1x4.0mm ² , 300mm or Customized length

Operating Properties

Operating Temperature	-40°C~+85°C
Maximum System Voltage (V)	1500V DC (IEC)
Maximum Series Fuse Rating (A)	30
Power Tolerance	0~+5W
Bifaciality	80±5%

Temperature Coefficient

Temperature Coefficient of Pmax	-0.26%/°C
Temperature Coefficient of Voc	-0.24%/°C
Temperature Coefficient of Isc	0.033%/°C
Nominal Operating Cell Temperature (NOCT)	43±2°C